


## Molecular Filters VF3

| References and Filter Types |           |   |           |
|-----------------------------|-----------|---|-----------|
| AS                          | H11053101 | F | H11053401 |
| BE+                         | H11053201 | K | H11053301 |

| Dimensions and Weight |                      |
|-----------------------|----------------------|
| Filter Dimensions     | 567.5 x 404 x 127 mm |
| Protruding Seal(s)    | 2                    |
| Filter Weight         | Env. 8.5 Kg          |

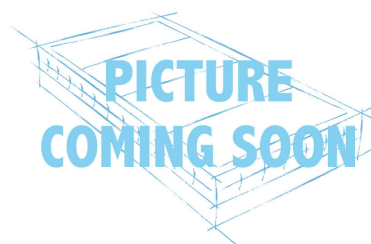

| Carbon Types |                                   |
|--------------|-----------------------------------|
| AS           | Predominantly Organic Vapors      |
| BE+          | Predominantly Acid Vapors         |
| F            | Predominantly Formaldehyde Vapors |
| K            | Predominantly Ammonia Vapors      |

| Filter Composition |                                                      |
|--------------------|------------------------------------------------------|
| Carbon Filter      | Polypropylene structure<br>Granular activated carbon |

| Quality                                                                                                                                                                                                                       |                                                                           |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|
| Each filter is supplied with a quality control certificate indicating the filter's serial number, manufacturing date, and packaging date. The carbon used in the filter has been tested according to the following standards: |                                                                           |
| ASTM D2854-83                                                                                                                                                                                                                 | Method for determining the bulk density of activated carbon               |
| ASTM D2862-82                                                                                                                                                                                                                 | Method for determining the particle size distribution of activated carbon |
| ASTM D5742-95                                                                                                                                                                                                                 | Method for determining the Butane working capacity of activated carbon    |
| ASTM D2866-83                                                                                                                                                                                                                 | Method for determining the ash content of activated carbon                |
| ASTM D2867-83                                                                                                                                                                                                                 | Method for determining the moisture content of activated carbon           |

| Warnings                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>Your protection is only guaranteed after approval by the Erlab® laboratory.</b></p> <p>Contact your supplier and benefit from the <b>ESP® (Erlab Safety Program)</b> to validate the compatibility of the filter type with your applications.</p> <ul style="list-style-type: none"> <li>- This filter must be stored in its original packaging and in a dry place.</li> <li>- It is recommended to wear gloves, safety glasses, and a lab coat when handling this filter.</li> </ul> |